


Referenz-Nr. Order No.	Spannhöhe Clamping Height				Spannhub Clamping Stroke	Vorhubphase Advance Stroke	L2	L3	L1	L4	W	L	H5	B
	Kontakt bearbeitete Fläche Finished Surface Contact		Kontakt grobe Fläche Rough Surface Contact											
	Min.	Max.	Min.	Max.										
1481-0150R	31.3	33.3	32.2	34.2	1.4	1.1	30	8	35	15.3	45	23	8	5.3
1481-0150L	(30.6-32)	(32.6-34)	(31.5-32.9)	(33.5-34.9)										
1481-0200R	32.5	39	33.5	40	1.5	1.4	37	8	45	20.7	65	30	12	8.4
1481-0200L	(31.7-33.2)	(38.2-39.7)	(32.7-34.2)	(39.2-40.7)										
1481-0300R	36.5	46	39	48.5	1.9	1.7	45	8	55	25.4	85	40	15	10.5
1481-0300L	(33.5-37.4)	(45-46.9)	(38-39.9)	(47.5-49.4)										


Referenz-Nr. Order No.	Dp	H	D	W1	W2	H3	H2	M	H4	R	A	H1	zulässige Betriebslast Allowable Operating Load (N)	Spannkraft Clamping Force Kgf	
1481-0150R	34	66	23	10	5.3	14	40	M5	28.5	63	20	61.3	150	180	250
1481-0150L															
1481-0200R	48	82	30	16	8.4	18	50	M8	45.5	80	26	76.5	200	220	570
1481-0200L															
1481-0300R	64	100	40	20	10.4	22	60	M10	57	100	33	93	300	350	1200
1481-0300L															

**1481 Körper**  
 • Gehärtet  
 • Schwarz beschichtet

**Spannspindel**  
 • Schwarz beschichtet


**1481 Body**  
 • Hardened  
 • Black coated

**Clamping Spindle**  
 • Black coated

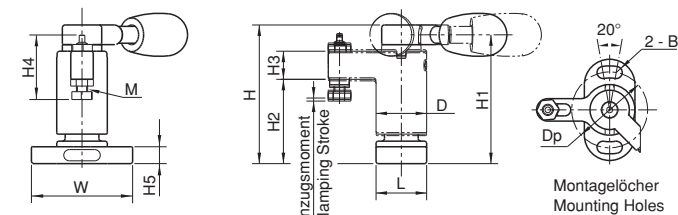

Kontakt grobe Fläche  
Rough Surface Contact

Kontakt bearbeitete Fläche  
Finished Surface Contact

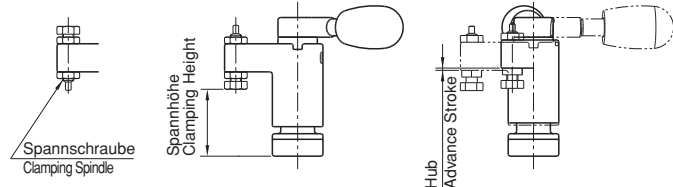

### Verwendung / How To Use

